




## LIQUID FILTER

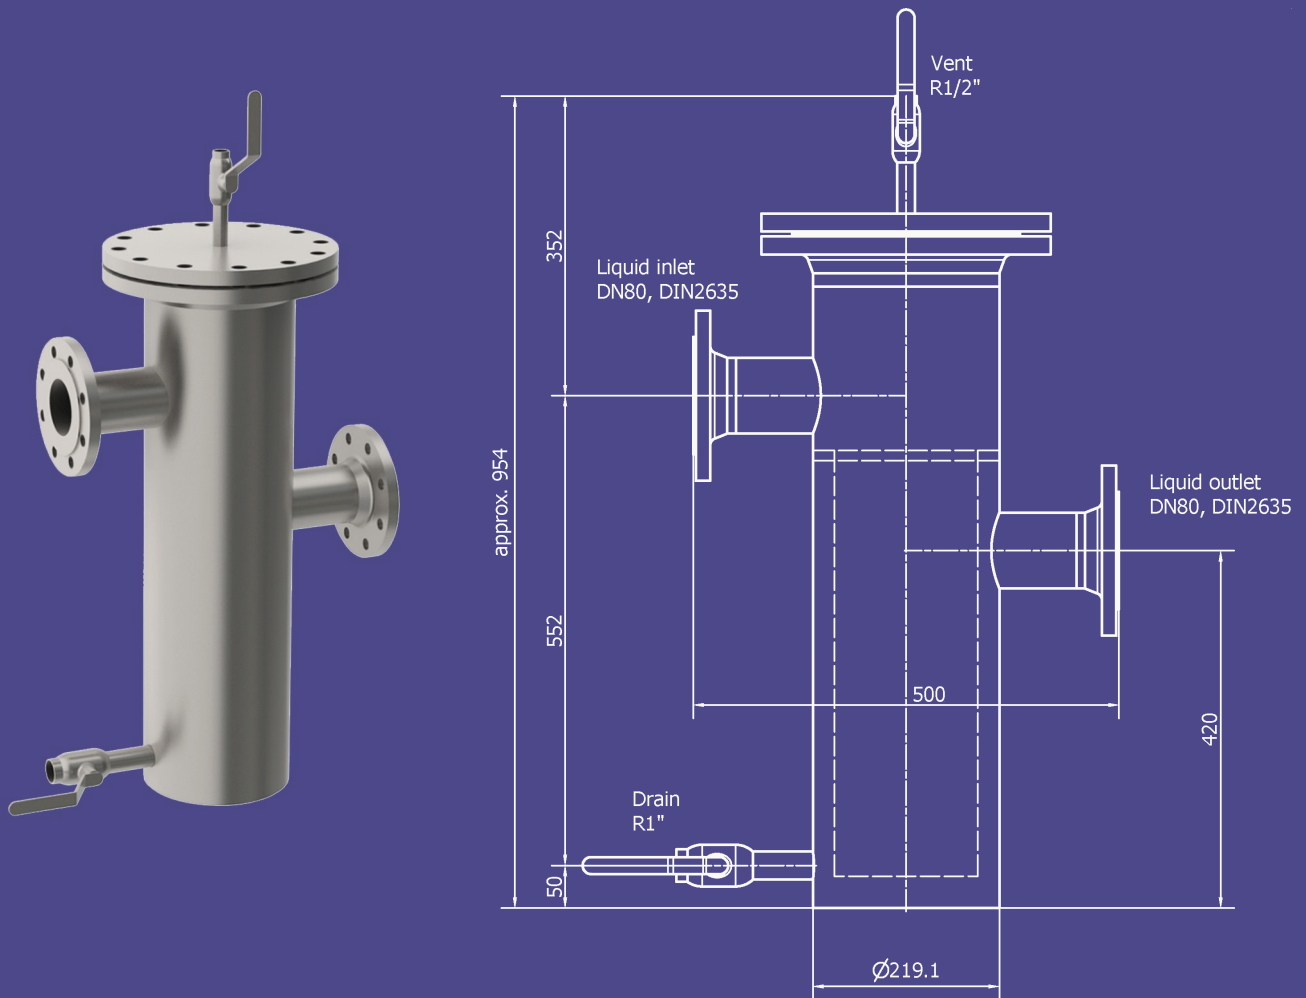

### LIQUID FILTER

The VM liquid filter is ideal for filtering various liquids, including water, glycol, oil and a variety of chemical substances.

Typically, the filter is installed on the pump's suction side. The filter prevents impurities in the liquid flow from entering the pump system or other parts. The filter housing is made of either P235GH carbon steel or EN 1.4301 or EN 1.4404 stainless steel, depending on the intended use. When necessary, the filter can be coated to protect it against aggressive chemical environments. The detachable strainer basket with a spring system is always made of stainless material. Vent and drain valves are included in the delivery.

Design temperature: 120 °C

Design pressure: 10 bar

Carbon steels: P235GH, P245GH and P265GH

Stainless steels: EN 1.4301 and EN 1.4404

Washable strainer basket DN150 with a screen size of 0.05 – 5.0 mm as a standard accessory  
Housing DN200

Connections DN 15-100 (Liquid inlet and outlet)

We also design and manufacture filters with customised dimensions and performance values.