


District heating filter

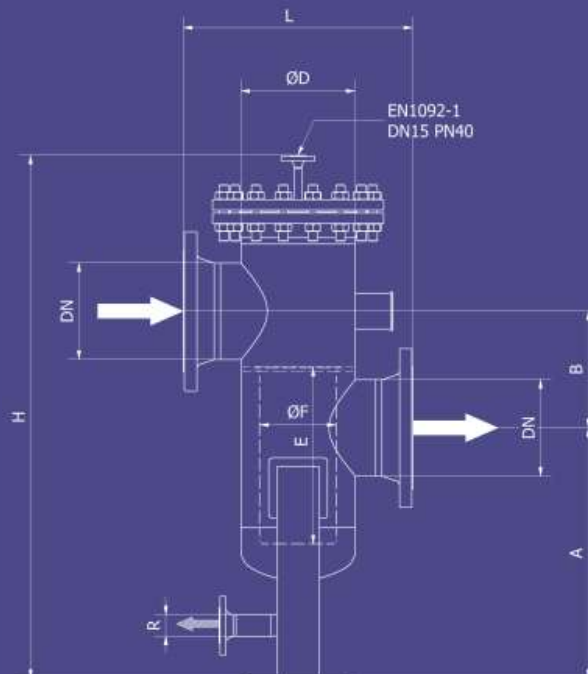

The district heating filter is installed on the suction side of the pump. The filter prevents impurities carried in the district heating water from entering pumps, control valves, or heat exchangers, where they can cause blockages or malfunctions.

- Design temperature: 110–140 °C
- Design pressure: 6–16 bar
- Standard materials: P265GH, P245GH, P235GH
- Special order materials: EN 1.4031 or EN 1.4404
- Washable stainless steel strainer basket as standard, screen size 0.25–5 mm
- Design and manufacturing in accordance with PED 2014/68/EU
- Wide range of sizes from DN15 to DN400
- Over 30 years of experience in pressure equipment and boiler systems

DN	ØD	L	H	A	B	R	ØF	E
15	219.1	450	1275	675	230	DN25	150	500
20	219.1	450	1275	675	230	DN25	150	500
25	219.1	450	1275	675	230	DN25	150	500
32	219.1	450	1275	675	230	DN25	150	500
40	219.1	450	1275	675	230	DN25	150	500
50	219.1	450	1275	675	230	DN25	150	500
65	219.1	450	1275	675	230	DN25	150	500
80	219.1	450	1275	675	230	DN25	150	500
100	219.1	450	1275	675	230	DN25	150	500
125	219.1	450	1275	675	230	DN25	150	500
150	219.1	450	1275	675	230	DN25	150	500
200	273	560	1365	690	270	DN25	200	500
250	323.9	650	1481	710	330	DN50	200	500
300	406.4	700	1660	785	380	DN50	250	600
350	508	850	1839	835	450	DN50	400	600
400	610	990	1908	835	475	DN50	400	600